



|              |                 |               |                |                 |        |        |        |                  |                   |
|--------------|-----------------|---------------|----------------|-----------------|--------|--------|--------|------------------|-------------------|
| ISO 2768-cv  | ±0,4            | ±1            | ±2             | ISO 2768-v      | ±3'    | ±Z'    | ±1'    | ±0'30'           | ±0'20'            |
| ISO 2768-f,m | ±0,2            | ±0,5          | ±1             | ISO 2768-c      | ±1'30' | ±1'    | ±0'30' | ±0'15'           | ±0'10'            |
| PROSTE MERE  | nad 0,5<br>do 3 | nad 3<br>do 6 | nad 6<br>do 30 | ISO 2768-m,f    | ±1'    | ±0'30' | ±0'20' | nad 50<br>do 120 | nad 400<br>do 400 |
|              |                 |               |                | KRAJŠE STRANICE | do 10  | do 50  | do 120 |                  |                   |

|             |    |    |    |      |      |      |      |               |                |
|-------------|----|----|----|------|------|------|------|---------------|----------------|
| ISO 2768-v  | ±8 | ±6 | ±4 | ±2,5 | ±2   | ±1,5 | ±1   | ±0,5          | ±0,2           |
| ISO 2768-c  | ±4 | ±3 | ±2 | ±0,5 | ±0,3 | ±0,2 | ±0,1 | nad 3<br>do 6 | nad 6<br>do 30 |
| ISO 2768-m  | ±4 | ±3 | ±2 | ±0,5 | ±0,3 | ±0,2 | ±0,1 | nad 3<br>do 6 | nad 6<br>do 30 |
| ISO 2768-f  | ±4 | ±3 | ±2 | ±0,5 | ±0,3 | ±0,2 | ±0,1 | nad 3<br>do 6 | nad 6<br>do 30 |
| PROSTE MERE | ±8 | ±6 | ±4 | ±2,5 | ±2   | ±1,5 | ±1   | nad 3<br>do 6 | nad 6<br>do 30 |

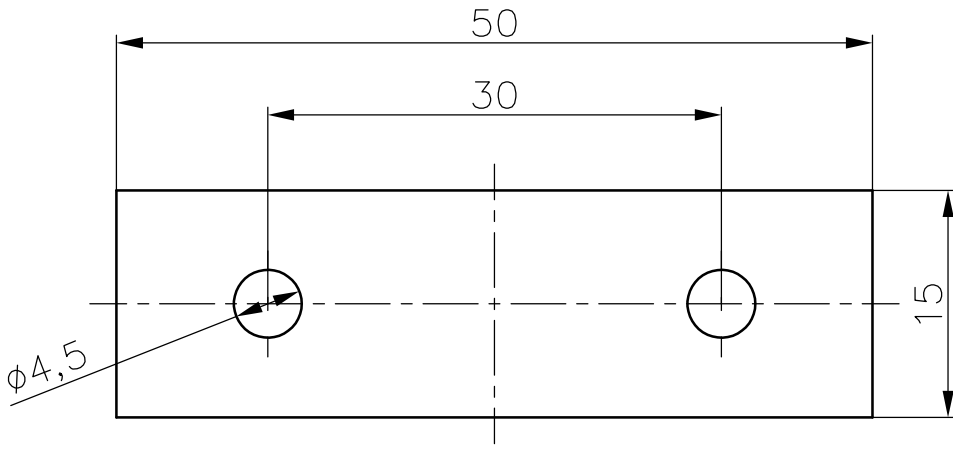

|   |           |   |     |  |  |                |  |                              |  |                    |  |
|---|-----------|---|-----|--|--|----------------|--|------------------------------|--|--------------------|--|
| Projekcije: Stanje robov po: ISO 2768-c |           | Stopnja točnosti prostih mer in oblik: ISO 2768-c |     | Površine v [µm] po:                              |  | Merilo: 2:1    |  | Pozicija: 3                  |  | Masa: 0,028 kg     |  |
| ISO 128                                 |           |   |     |  |  | Material: S235 |  |                              |  |                    |  |
| Splošni principi toleriranja:           |           |   |     | Datum  |  | Ime            |  | Naziv in mere:               |  |                    |  |
| Geometrijske tolerance po:              |           |   |     | Risal  |  | T. Skalar      |  | Distančnik-vzorec<br>50x15x5 |  |                    |  |
|   |           |   |     | Kontr.   |  |                |  |                              |  |                    |  |
|   |           |   |     | K.std.   |  |                |  |                              |  |                    |  |
|   |           |   |     | Univerza v Ljubljani<br>Fakulteta za strojništvo |  | Št. risbe:     |  | 1-03                         |  | Str./Strani<br>4/9 |  |
| Ozn.                                    | Sprememba | Datum   | Ime | Datoteka:  |  |                |  |                              |  | Format:<br>A4      |  |