

## ERRATA

In **Page 20** replace **Figure 13.** with

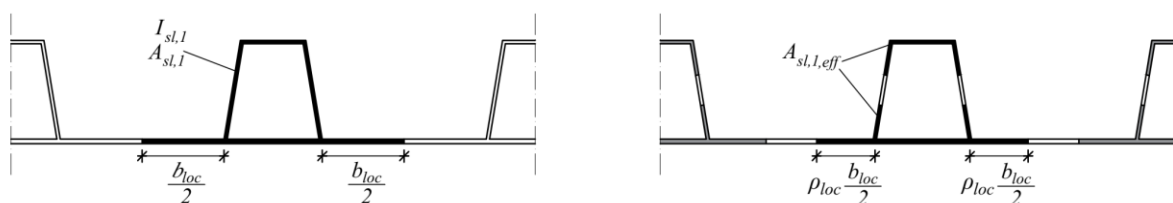


Figure 13. Longitudinal stiffener with adjacent parts of the plate for a) gross and b) effective cross section  
 Slika 13. Vzdolžna ojačitev s sodelujočim delom pločevine za a) bruto in b) efektivni prerez

In **Page 66** replace **Table 8.** with

Table 8. Estimated values of the design procedure according to EN 1993-1-5

Preglednica 8. Izvrednotne vrednosti po standardu EN 1993-1-5

Specimen	$A_c$ [cm <sup>2</sup> ]	$A_{c,eff,loc}$ [cm <sup>2</sup> ]	$\sigma_{cr,p}$ [kN/cm <sup>2</sup> ]	$\rho_p$	$\sigma_{cr,c}$ [kN/cm <sup>2</sup> ]	$\chi_c$	$\xi$	$\rho_c$	$A_{edge,eff}$ [cm <sup>2</sup> ]	$A_{c,eff}$ [cm <sup>2</sup> ]	$F_{u,EN}$ [kN]
1C	28.3	24.8	1561	1.0	1688	0.78	0.0	0.78	10.8	30.1	1629
2C	27.5	23.2	1398	1.0	1523	0.77	0.0	0.77	10.6	28.5	1591
3C	20.4	14.4	1647	1.0	1904	0.82	0.0	0.82	5.4	17.2	961
4C	20.4	12.6	1498	1.0	1719	0.78	0.0	0.78	5.2	15.0	1143
5C	21.4	15.8	456	0.80	501	0.55	0.0	0.55	5.3	14.0	795
6C	21.4	15.7	559	0.86	625	0.62	0.0	0.62	5.4	15.1	874
1F	28.3	24.8	1561	1.0	1688	0.78	0.0	0.78	10.8	30.1	1629